



**H-7022**  
HEMATOLOGY ANALYZER

● LABOMED. INC.

# H-7022

3-PART 23 PARAMETERS HEMATOLOGY ANALYZER

**TOUCH SCREEN**

● LABOMED. INC.

# H-7022

3-PART 23 PARAMETERS HEMATOLOGY  
ANALYZER

TOUCH SCREEN



Specifications		
<b>Operation Mode:</b>	USB keyboard & mouse. Based on Linux system	
<b>Parameters:</b>	3-part differential of WBC; 20 parameters + 3 color histograms (WBC/RBC/PLT)	
<b>Sample Consumption:</b>	Venous Mode: 9.6µL, Capillary Mode: 9.6µL, Pre-diluted Mode: 20µL	
<b>Working Mode:</b>	Double passages counting detection + independent HGB measurement system; 24 hours with auto standby	
<b>Language:</b>	Multi-language supported	
<b>Throughput:</b>	≥60 samples/hour	
<b>Storage:</b>	50,000 sample results with histograms, record supported export and backup	
<b>QC mode:</b>	L-J,SD,CV,QC histogram	
<b>Cross Contamination Ratio:</b>	WBC/RBC/HGB<0.5%, PLT<1%	
<b>Performance:</b>	Parameter Repeatability (CV %)	Linear Range
	WBC≤2.5%	0.00-99.9x10 <sup>9</sup> /L
	RBC≤2.0%	0.00-9.99x10 <sup>12</sup> /L
	HGB≤1.5%	0-300g/L
	MCV≤0.4%	40 - 150fL
	PLT≤5.0%	0-999x10 <sup>9</sup> /L
<b>Display:</b>	8" LCD, resolution :800 × 600	
<b>Reference Value:</b>	Baby, Kid, Woman, Man, Normal and Customization	
<b>Interface:</b>	4 ×USB, 1 × ethernet, 1 ×VGA (for external monitor)	
<b>Printer:</b>	Bulit-in thermal printer, support external laser and inkjet printer, 5 kinds of report formats supported	
<b>Environment Requirement:</b>	Temperature: 15℃~35℃; Humidity: 10%~90%;	
<b>Power supply:</b>	AC100~240V 50/60Hz	

● **LABOMED, INC.**

Add:2728 S La Cienega Blvd. Los Angeles,  
CA 90034 U.S.A

Tel: (310)202-0811 FAX (310)202-7286





Email: [spectro@labomed.com](mailto:spectro@labomed.com)

# H-7022

## 3-PART 23 PARAMETERS HEMATOLOGY ANALYZER TOUCH SCREEN

H-7022 Hematology Analyzer is a 3-part differential of WBC blood cell counter. It is advantaged at digital technology, auto-relocation separatrix, intelligent flush clog, dual measuring technology (with time and volume) to ensure precise of the test results.


### Advanced Technology

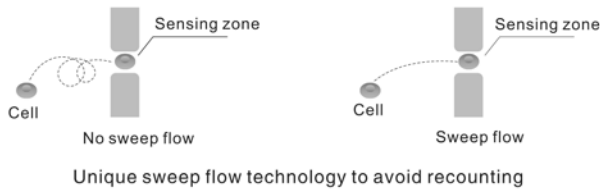

Auto sample probe cleaning



Auto standby and wakeup

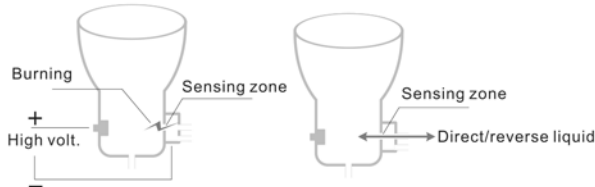

### Automated & User-friendly Interface

- 8 inch LCD display, resolution:800\*600
- Real-time alert for abnormal results
- USB keyboard & mouse operation
- Based on Linux
- Easy to search and edit patient information
- Storage capacity:50,000 sample results include histograms
- Optional printout for formats
- Real-time guideline for easy operation

### Accurate Results & Low Sample Consumption

- Accurate analysis technology with low sample consumption:
  - Venous mode: 9.6ul
  - Capillary mode: 9.6ul
  - Pre-diluted mode: 20ul



### Easy Maintenance & Environment-friendly System

- Adjustable sample probe for various cuvettes
- With liquid sensor to alarm low reagent
- Cyanide-free Lyse
- Automated & Systematic diagnosis and maintenance with alerts
- Liquid tubing and electronic circuit separately for easy maintenance
- Closed reagent tubing to avoid contamination

### Perfect QC System

- Calibration mode: manual and auto
- QC mode: L-J, SD, CV, QC histogram

Three sample modes: venous, capillary and pre-diluted

23 parameters:



WBC

Lymph#

Mid#

Gran#

Lymph%

Mid%

Gran%

RBC

HGB

HCT

MCV

MCH

MCHC

RDW-CV

RDW-SD

PLT

MPV

PDW

PCT

P-LCR

